



WARING COMMERCIAL

UK 230 volt Bar Blender
with Eastman Container

BB25EPK




028628
Name Plate

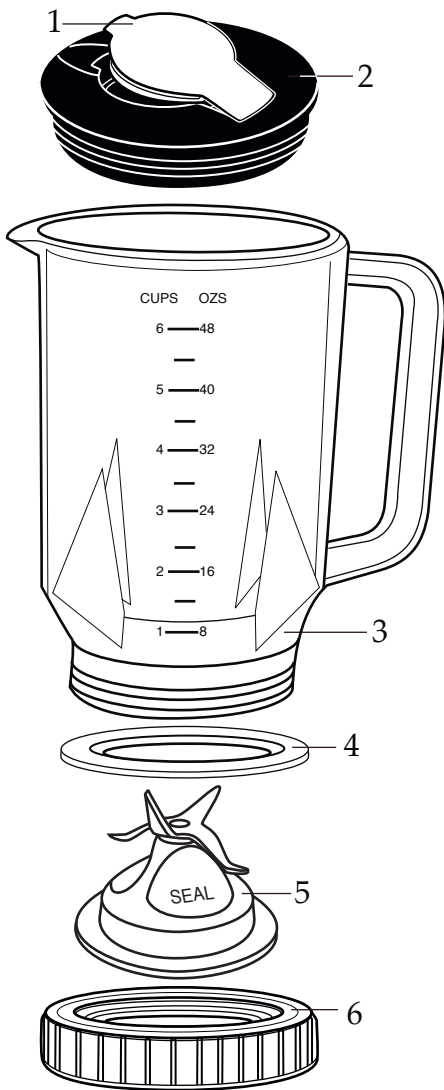


501412
Jar with Blending Assembly
and Collar

502559-09-E
(changed after 5/30/2008)
Jar with 2 Piece Lid

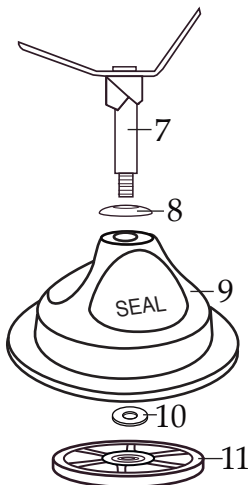

502508 Blending Assembly
(parts that can be purchased separately)

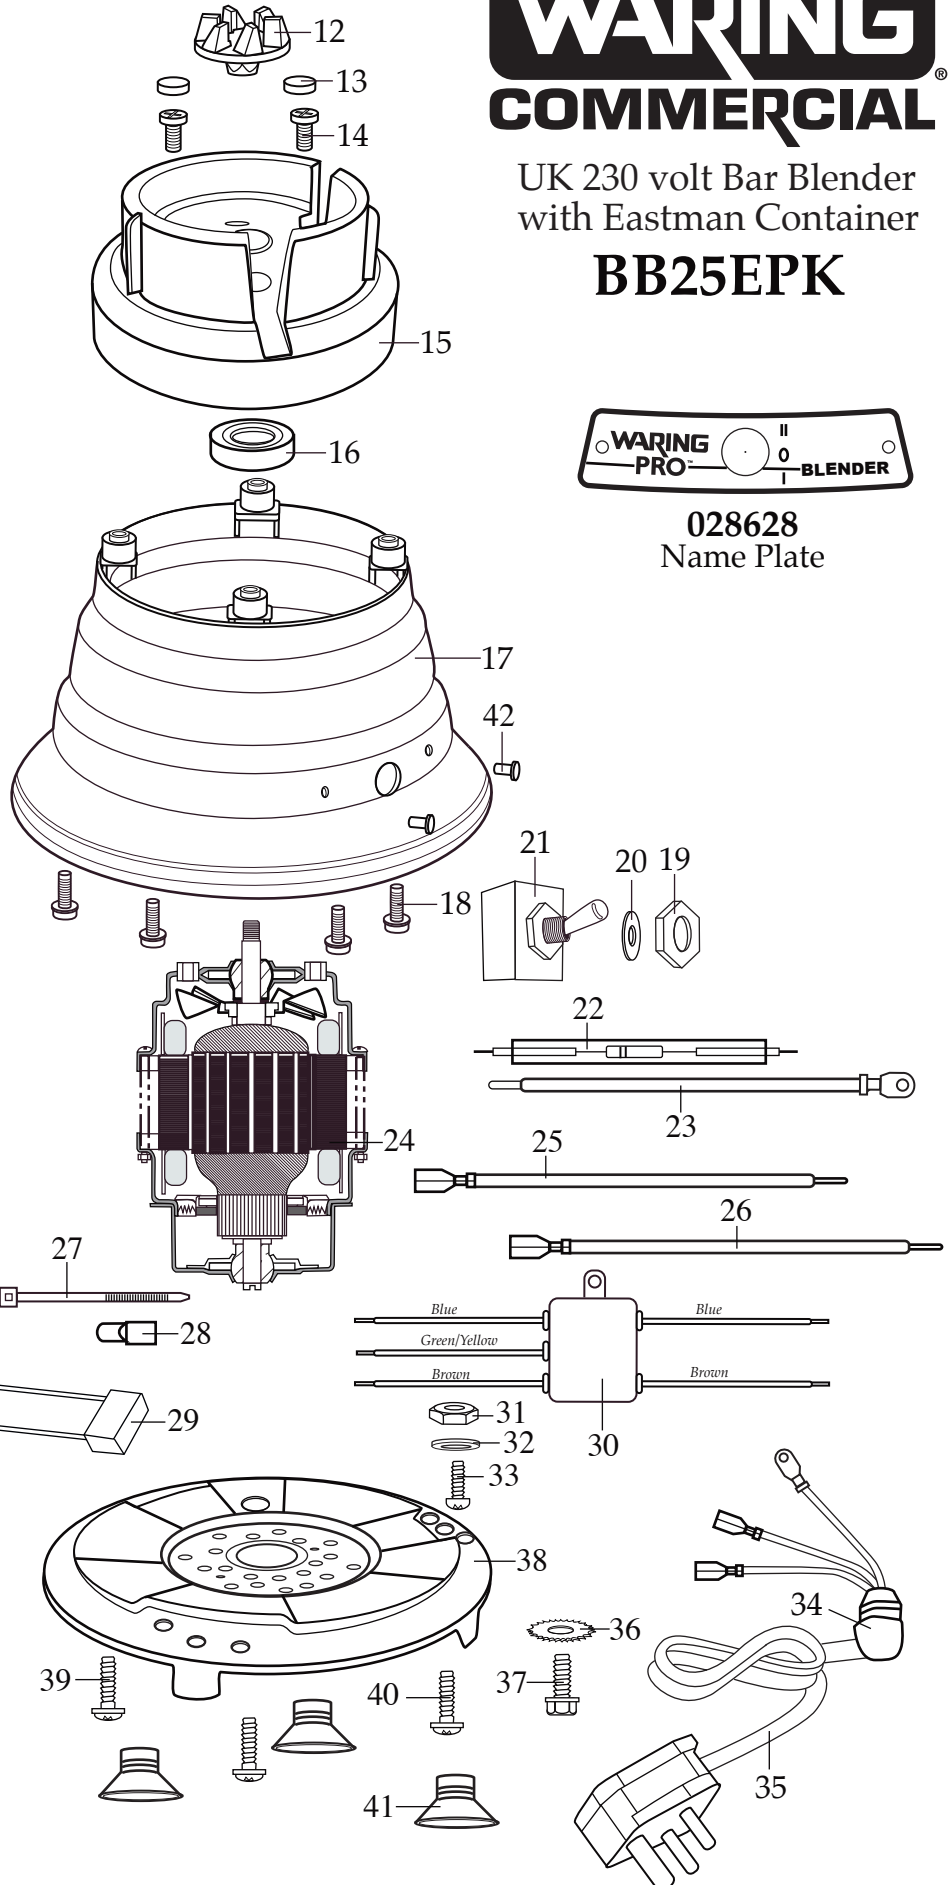

Illustration#	Part#	Description
1	018534	Lid Insert
2	024367-09	Black Outer Lid <i>(changed after 5/30/2008)</i>
3	018531-E	48 oz. Eastman Jar <i>(changed after 5/30/2008)</i>
4	006890	Gasket
5	502508	Blending Assembly
6	015388-09	Black Jar Bottom
7	502507	Cutter & Shaft
8	017832	Bearing Cap
9	500122	Bearing Holder
10	006937	Washer
11	003138	Coupling
12	007509	Coupling (1 required <i>on units after 5/30/2008</i>) - (2 required)
13	016094	Hole Plug (2 required)
14	013768	Screw (2 required)
15	017381-09-R	Black Jar Adapter <i>(changed after 5/30/2008)</i>
16	018605	Housing Seal
17	019608-09W	Black Wrinkle Base
18	024595	Screw & Washer (4 required)
19	016236 015098	Hex Nut <i>(on units after 5/30/2008)</i> Nut Ring
20	014604	Washer
21	026537	Switch
22	502763	Resistor Assembly
23	501400	Green-Yellow Lead
24	026535	Motor
25	502838	White Lead Assembly
26	502753	Brown Lead Assembly
27	013731	Cable Tie (10 required)
28	012409 019123 012409	Small Crimp Connector (3 required <i>on units after 11/7/2008</i>) Large Crimp Connector (2 required <i>on units after 11/7/2008</i>) Crimp Connector (5 required)
29	026666	EMI Capacitor
30	502752	EMI Filter
31	002944	Hex Nut

Illustration#	Part#	Description
32	002943	Washer
33	013659	Screw (on units after 11/7/2008)
	013270	Screw
34	013680	Strain Relief
35	502571	Cord Set
36	002943	Lock Washer (3 required)
37	027278	Ground Screw (2 required on units after 5/30/2008)
	013659	Screw (2 required)
38	024055-R	Bottom Plate ONLY (on units after 5/21/2008)
	502842	Bottom Plate & Cord Set Assembly (on units after 5/21/2008)
	018454	Bottom Plate ONLY
39	018477	Special Screw
40	013659	Screw (2 required)
41	026278	Suction Cup Foot (3 required)
42	003532	Rivet (2 required)

Parts No Longer Used
 (on units before 7/20/2012)

- 024303 - Bottom Plate Plug
- 015179 - Screw (2 required)
- 024368 - Reset Switch
- 014604 - Lock Washer
- 015184 - Hex Nut

Wiring Diagram
 (on units after 6/25/2010)

